

Constant Voltage Driver

Model:LV(30-250)W24CG



Model	Rated Input Voltage	Input Power	Input Current	PF	Output Power Range	Output Voltage	Output Current	Efficiency (typ.)
LV30W24CG	220-240VAC	≤38W	≤0.19A	≥0.95	0-30W	24V	0-1.25A	85%
LV60W24CG		≤72W	≤0.35A		0-60W		0-2.5A	88%
LV100W24CG		≤115W	≤0.6A		0-100W		0-4.17A	93%
LV150W24CG		≤168W	≤0.9A		0-150W		0-6.25A	93%
LV250W24CG		≤275W	≤1.5A		0-250W		0-10.42A	93%

* Test result @230V, 50Hz, Full Load.

1. Parameters

category	Item	Technical Norm
Features	Output Type	Constant Voltage
	Dimmable Type	Non-dimmable
	Output Features	Isolation SELV
	IP Grade	IP20
	Insulation Class	Class II
Input	Rated Input Voltage	220-240VAC
	Range of AC Input Voltage	176-264VAC
	Range of DC Input Voltage	175-280VDC(EMI not evaluated)
	Frequency	Rate:50/60Hz, Range:47~63Hz
	Power Factor	≥0.95, 220-240VAC, Rated Load, see graphs
	THD	≤7% 230VAC, Rated Load, see graphs
	Standby Power Consumption	≤0.5W, @230VAC,Dim to OFF
Inrush Current	Model	I_{peak} (typ.) Duration time
	30W	<100A 82A 0.8us
	60W	<30A 26A 220us
	100W	<50A 45A 250us
	150W	<60A 56A 185us
	250W	<80A 76A 310us
Connected quantity of 16A Breaker	30W	36pcs, 16A type B / 60pcs 16A type C
	60W	18pcs, 16A type B / 30pcs 16A type C
	100W	10pcs, 16A type B / 17pcs 16A type C
	150W	8pcs, 16A type B / 13pcs 16A type C
	250W	6pcs, 16A type B / 8pcs 16A type C

Output	Output Voltage	24VDC \pm 3%			
	Output Voltage Ripple	30W	<480mV _{PK-PK} (1%)		
		60W/100W/150W/250W	<240mV _{PK-PK} (0.5%)		
	Line Regulation	\pm 1%			
	Load Regulation	\pm 2%			
	Overshoot	<105%Vo (<110%Vo, only for 30W)			
	Start-up Time	\leq 0.5S (220-240VAC)			
	Hold-up time & Turn off time (Typical)	Model	Hold-up time(mS)	Turn-off time(mS)	230VAC, LED Rated Load, Hold-up time measure from AC input turn-off to output voltage drop to 90%, turn-off time measure from AC input turn-off to output voltage drop to 10%
		30W	6.8	800	
		60W	22.8	62.8	
		100W	9.2	69.6	
		150W	10	384	
Efficiency	30W	\geq 84%	85% typ.	230VAC, Rated Load, at output terminals, see graphs	
	60W	\geq 86%	88% typ.		
	100W	\geq 91%	93% typ.		
	150W	\geq 91%	93% typ.		
	250W	\geq 91%	93% typ.		
Protection	Short Circuit Protection	Auto Recovery			
	Over Current Protection	120%-180%Io, Auto Recovery			
	Over Voltage Protection	110%-150%Vo, Auto Recovery			
	Over Temperature Protection	90<Tc<110°C, Auto Recovery(only for 100W/150W/250W)			
	Insulation voltage	I/P to O/P,3KVac/5mA/1min			
	Insulation resistance	>100M ohm @ 500VDC			
	Leakage current	I/P to O/P < 250 μ A			
Environment	Ta/Operation Temperature	-25.....+45°C			
	Ts/Storage Temperature	-40.....+85°C			
	Tc/Enclosure Temperature For Safety	30W/60W	80°C		
		100W/150W/250W	90°C		
	Humidity	5%....85%RH			
	Atmosphere	86-108KPa			
Construction	Connection Method	Terminal			
	Cable Terminals	Input	1 terminal block(300V 10A)		
		Output	30W/60W	1 terminal block(300V 10A)	
			100W/150W/250W	2terminals block(min.150V 10A)	
	Installation	Independent			
	Input Wire Cross Section	0.75mm ² -1.5 mm ²			
	Output Wire Cross Section	30W	1*0.5mm ² -1.5 mm ²		
		60W	1*0.75mm ² -1.5 mm ²		
		100W/150W	2*0.75mm ² -1.0 mm ²		
250W		2*0.75mm ² -1.5 mm ²			
Output Cable Length	Max. 3M				


	Cable diameters range	Input	2.2-4mm or 9.5-10.5mm		
		Output & Dimming	2.2-4mm		
	Dimension	30W/60W	300*30*16mm (L*W*H)		
		100W/150W	350*30*18mm (L*W*H)		
250W		400*40*22mm (L*W*H)			
Standards	Certification	CE, ENEC, SAA			
	Safety Standards	EN61347-1:2015, EN61347-2-13:2014/A1:2017, EN62493:2015, AS61347.2.13:2018, AS/NZS 61347.1:2016 Inc A1			
	EMC Standards	EN55015:2013/A1:2015, EN61000-3-2:2014, EN61000-3-3:2013, EN61547:2009			
	Performance	EN62384			
	Surge	L-N:2KV			
Others	RoHS	2011/65/EU			
	MTBF	≥250KHours, Ta=25°C (MIL-HDBK-217F)			
	Audible Noise	<25dB @ 10cm distance, 20dB background			
	Life Time	30W	≥80K Hrs	@230VAC , full load, see graphs. End of Life: Failure Rate<10%.	
		60W	≥65K Hrs		
		100W	≥60K Hrs		
		150W	≥55K Hrs		
250W		≥52K Hrs			
Warranty	5years				

Remark:


1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
3. Output ripple should be measured at the output end which has with 0.1uF/50V ceramic capacitance and 47uF/50V Aluminum capacitance connected in parallel. Measured using oscilloscope with bandwidth limited to 20MHz.

2. Graph


PF VS LOAD Curve

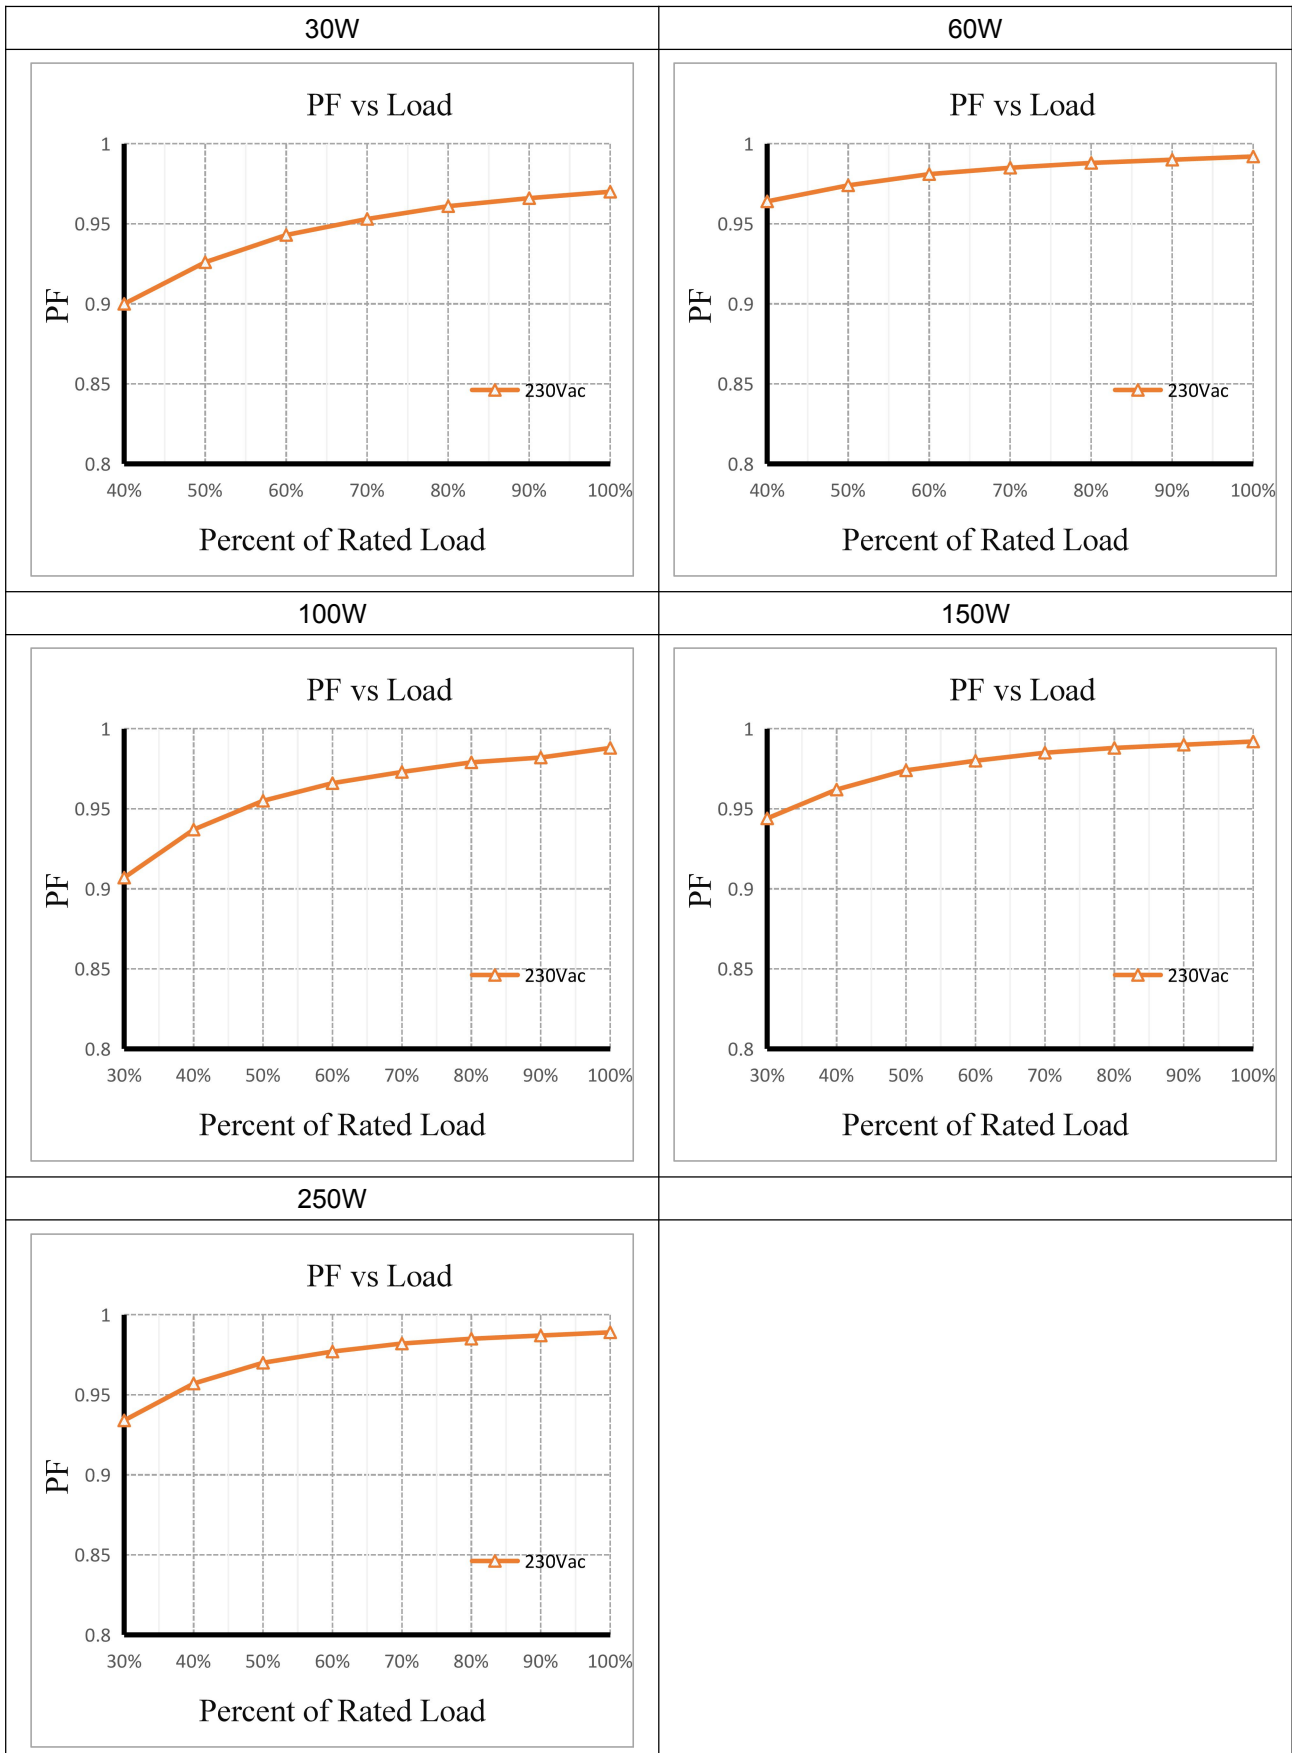

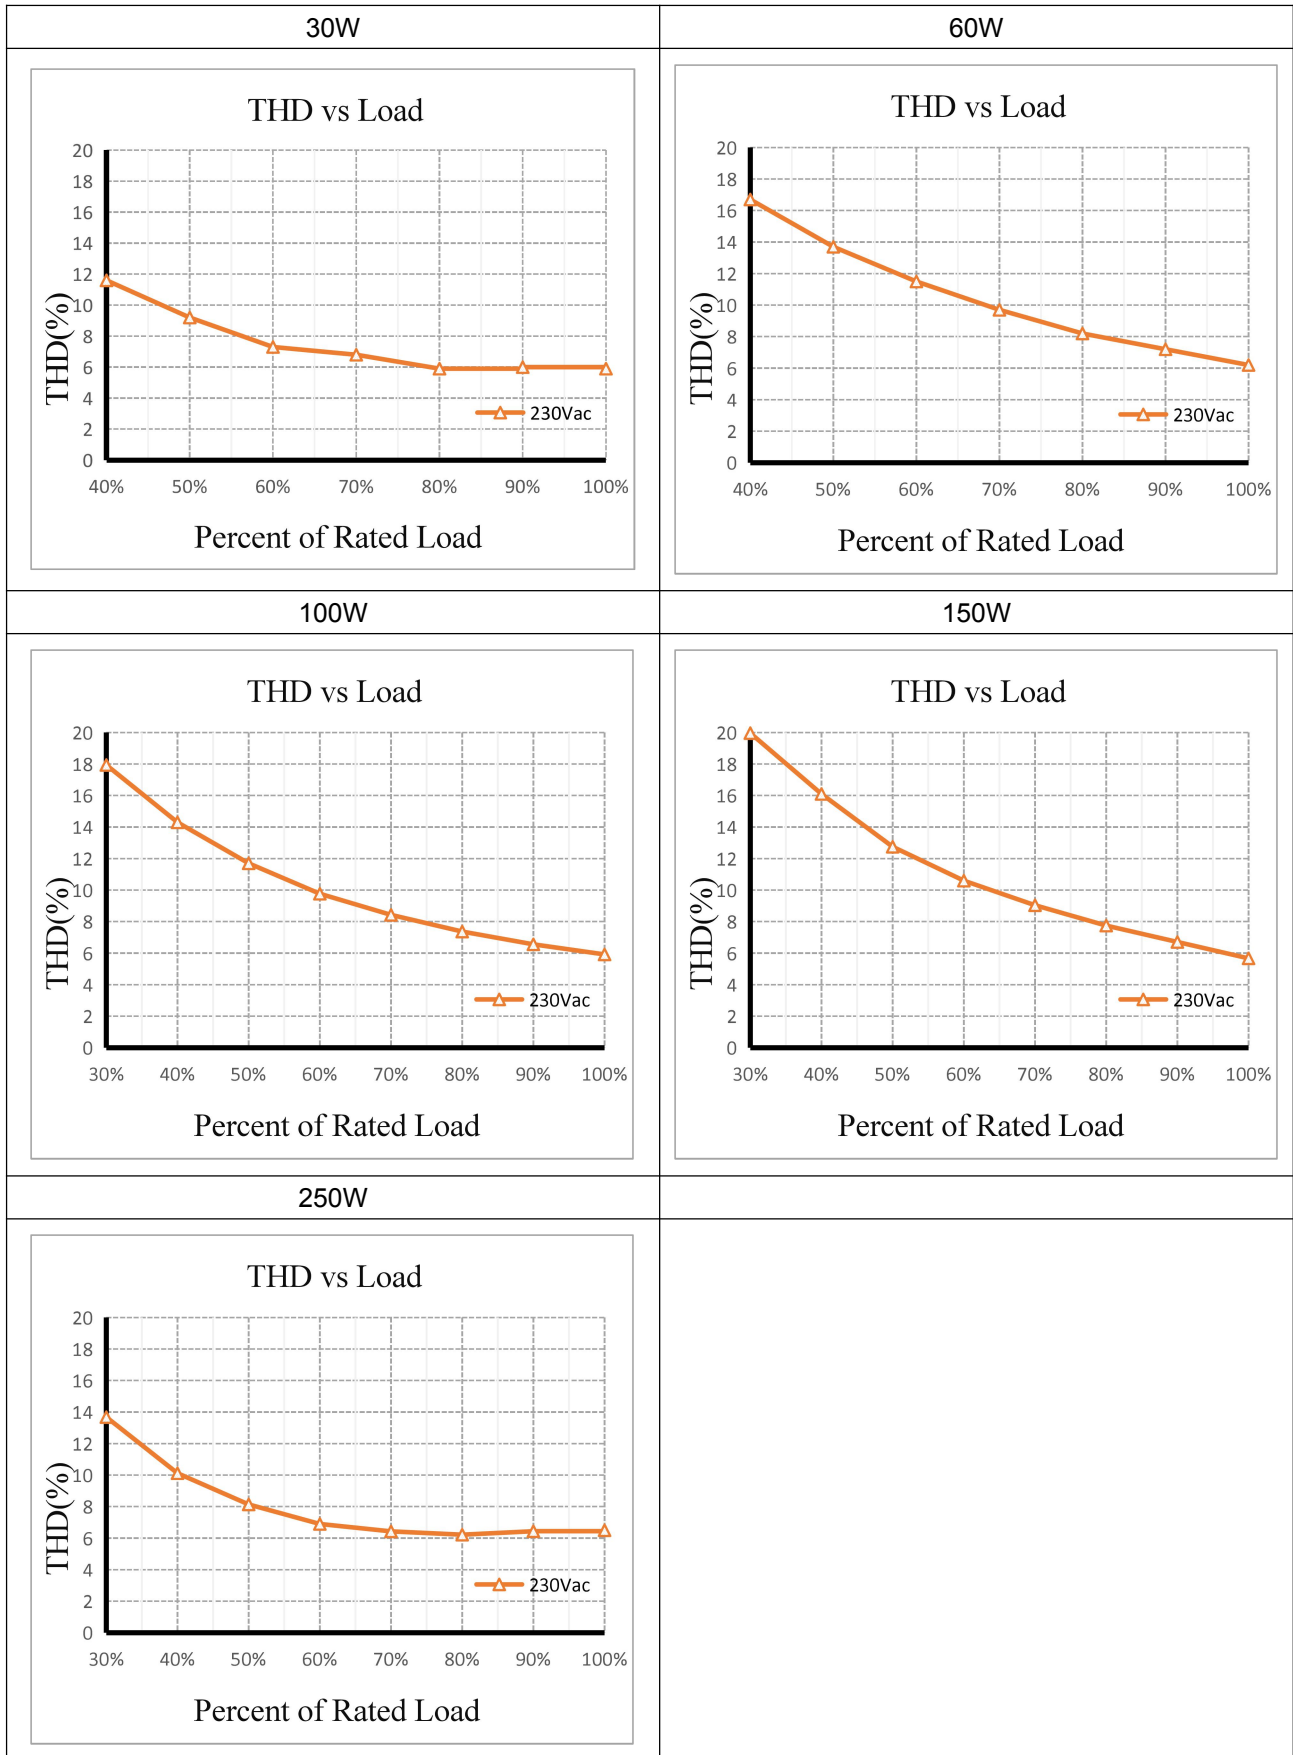

THD VS LOAD Curve



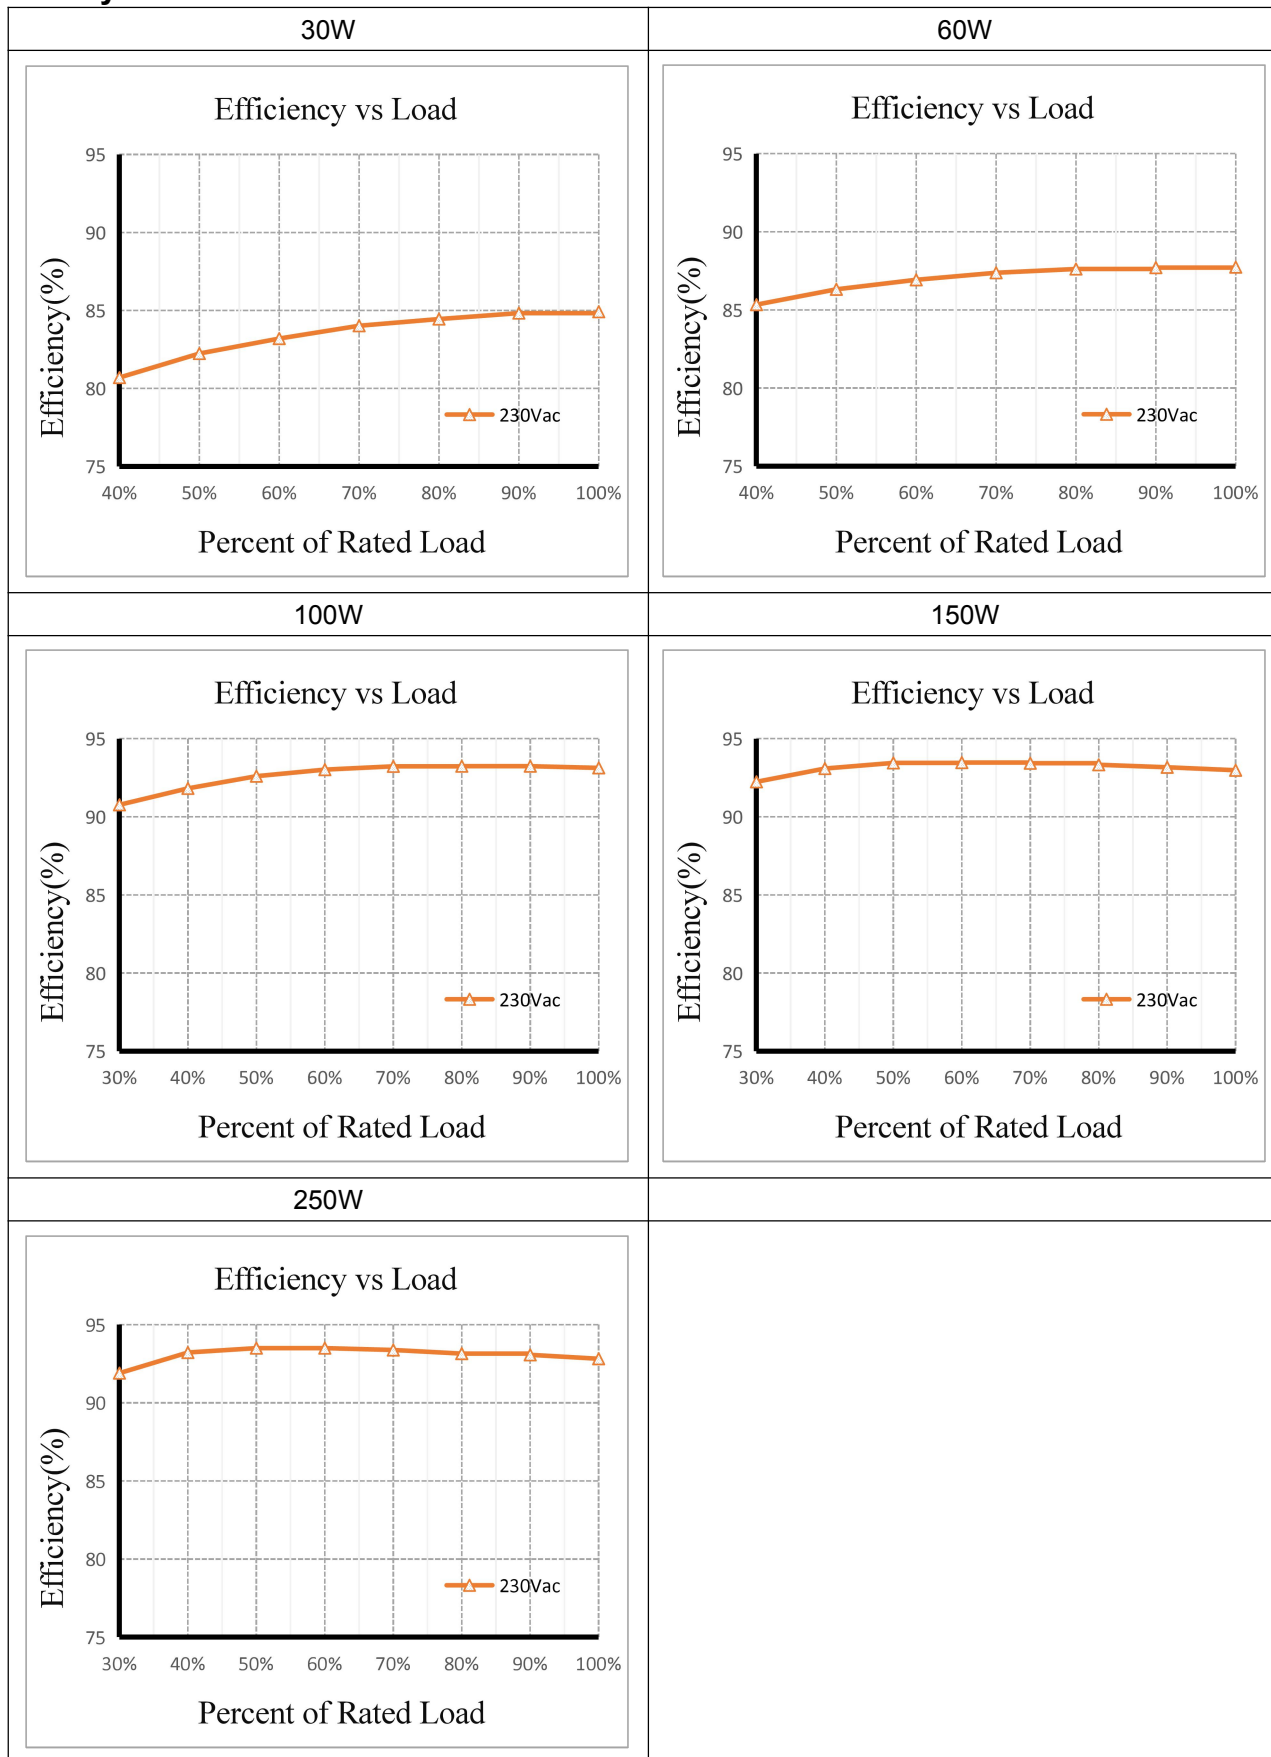



Efficiency VS LOAD Curve







3. Label

<input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm)	 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid	LED Driver LV30W24CG Constant Voltage Type For LED modules only	Input Voltage: 220-240V~ Input Frequency: 50/60Hz Power Factor(λ): ≥ 0.95 $I_{in} \leq 0.19A$	U _{rated} = 24V= I _{range} = 0-1250mA P _{range} = 0-30W Ta: -25to+45°C Tc: 80°C		<input type="checkbox"/> I <input type="checkbox"/> O OUTPUT

<input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm)	 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid	LED Driver LV60W24CG Constant Voltage Type For LED modules only	Input Voltage: 220-240V~ Input Frequency: 50/60Hz Power Factor(λ): ≥ 0.95 $I_{in} \leq 0.35A$	U _{rated} = 24V= I _{range} = 0-2500mA P _{range} = 0-60W Ta: -25to+45°C Tc: 80°C		<input type="checkbox"/> I <input type="checkbox"/> O OUTPUT


<input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm)	 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid	LED Driver LV100W24CG Constant Voltage Type For LED modules only	Input Voltage: 220-240V~ Input Frequency: 50/60Hz Power Factor(λ): ≥ 0.95 $I_{in} \leq 0.6A$	U _{rated} = 24V= I _{range} = 0-4170mA P _{range} = 0-100W Ta: -25to+45°C Tc: 90°C		<input type="checkbox"/> I <input type="checkbox"/> O OUTPUT LED- <input type="checkbox"/> + <input type="checkbox"/> + LED+

<input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm)	 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid	LED Driver LV150W24CG Constant Voltage Type For LED modules only	Input Voltage: 220-240V~ Input Frequency: 50/60Hz Power Factor(λ): ≥ 0.95 $I_{in} \leq 0.9A$	U _{rated} = 24V= I _{range} = 0-6250mA P _{range} = 0-150W Ta: -25to+45°C Tc: 90°C		<input type="checkbox"/> I <input type="checkbox"/> O OUTPUT LED- <input type="checkbox"/> + <input type="checkbox"/> + LED+


<input type="checkbox"/> L <input type="checkbox"/> N wire preparation (6mm)	 KGP Electronics GmbH Hueckstraße 19 DE-58511 Lüdenscheid	LED Driver LV250W24CG Constant Voltage Type For LED modules only	Input Voltage: 220-240V~ Input Frequency: 50/60Hz Power Factor(λ): ≥ 0.95 $I_{in} \leq 1.5A$	U _{rated} = 24V= I _{range} = 0-10420mA P _{range} = 0-250W Ta: -25to+45°C Tc: 90°C		<input type="checkbox"/> I <input type="checkbox"/> O OUTPUT LED- <input type="checkbox"/> + <input type="checkbox"/> + LED+

4. Dimension (Unit: mm)


LV30W24CG & LV60W24CG:

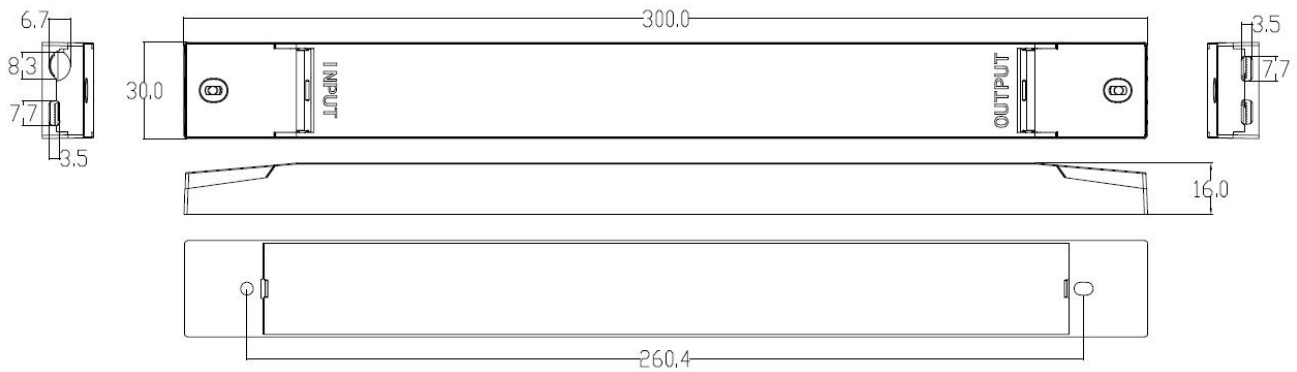

LV100W24CG & LV150W24CG:

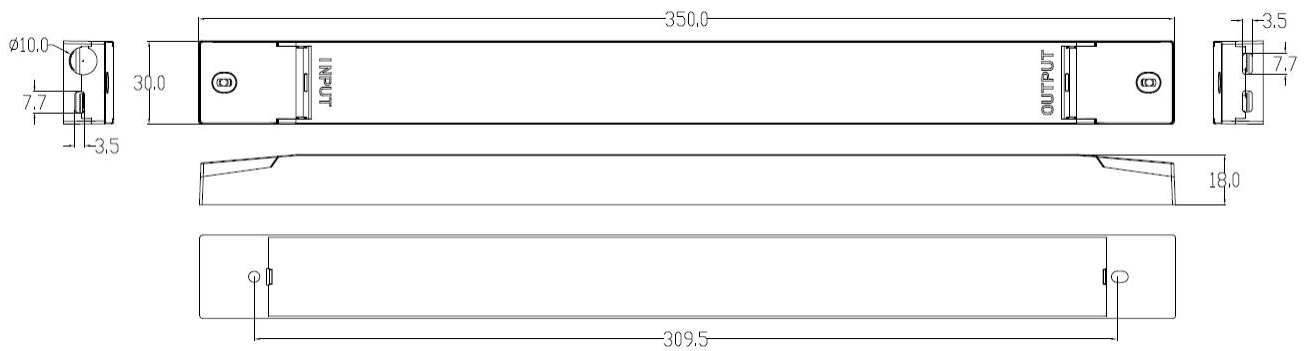

LV250W24CG:

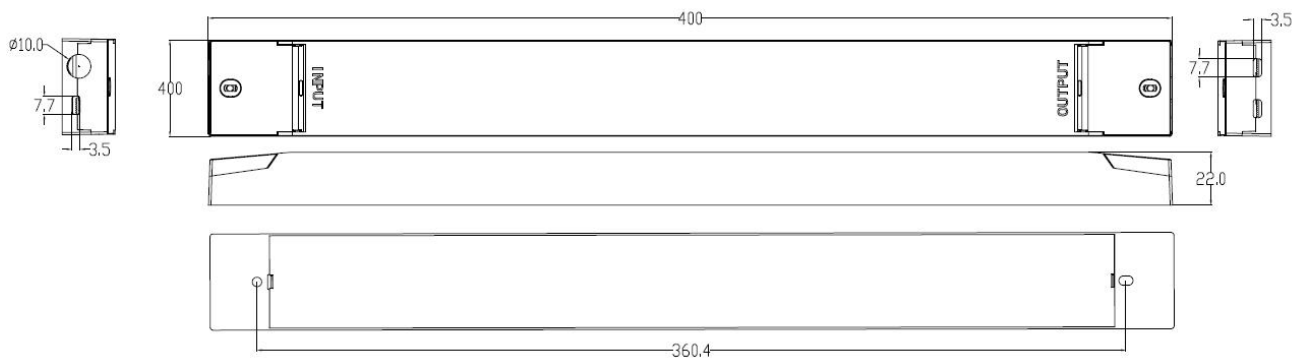

5. Packing information

Packing way	Model	Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
With white box and manual	LV30W24CG	450*240*200	45	0.143	6.44	6.96
	LV60W24CG		45	0.23	10.35	10.87
	LV100W24CG		35	0.21	7.35	7.87
	LV150W24CG		35	0.31	10.78	11.3
	LV250W24CG		30	0.53	15.9	16.42
Without white box and manual	LV30W24CG		75	0.125	9.38	10.08
	LV60W24CG		75	0.21	15.75	16.45
	LV100W24CG		70	0.19	12.88	13.48
	LV150W24CG		70	0.28	19.6	20.2
	LV250W24CG		40	0.5	20	20.6

6. REVISION HISTORY

DATE	REV.	REMARK
2020-05-18	V0.01	Initial release.